


TOPAIRE
AIR CONDITIONER

Wall Mounted
CHILLED WATER

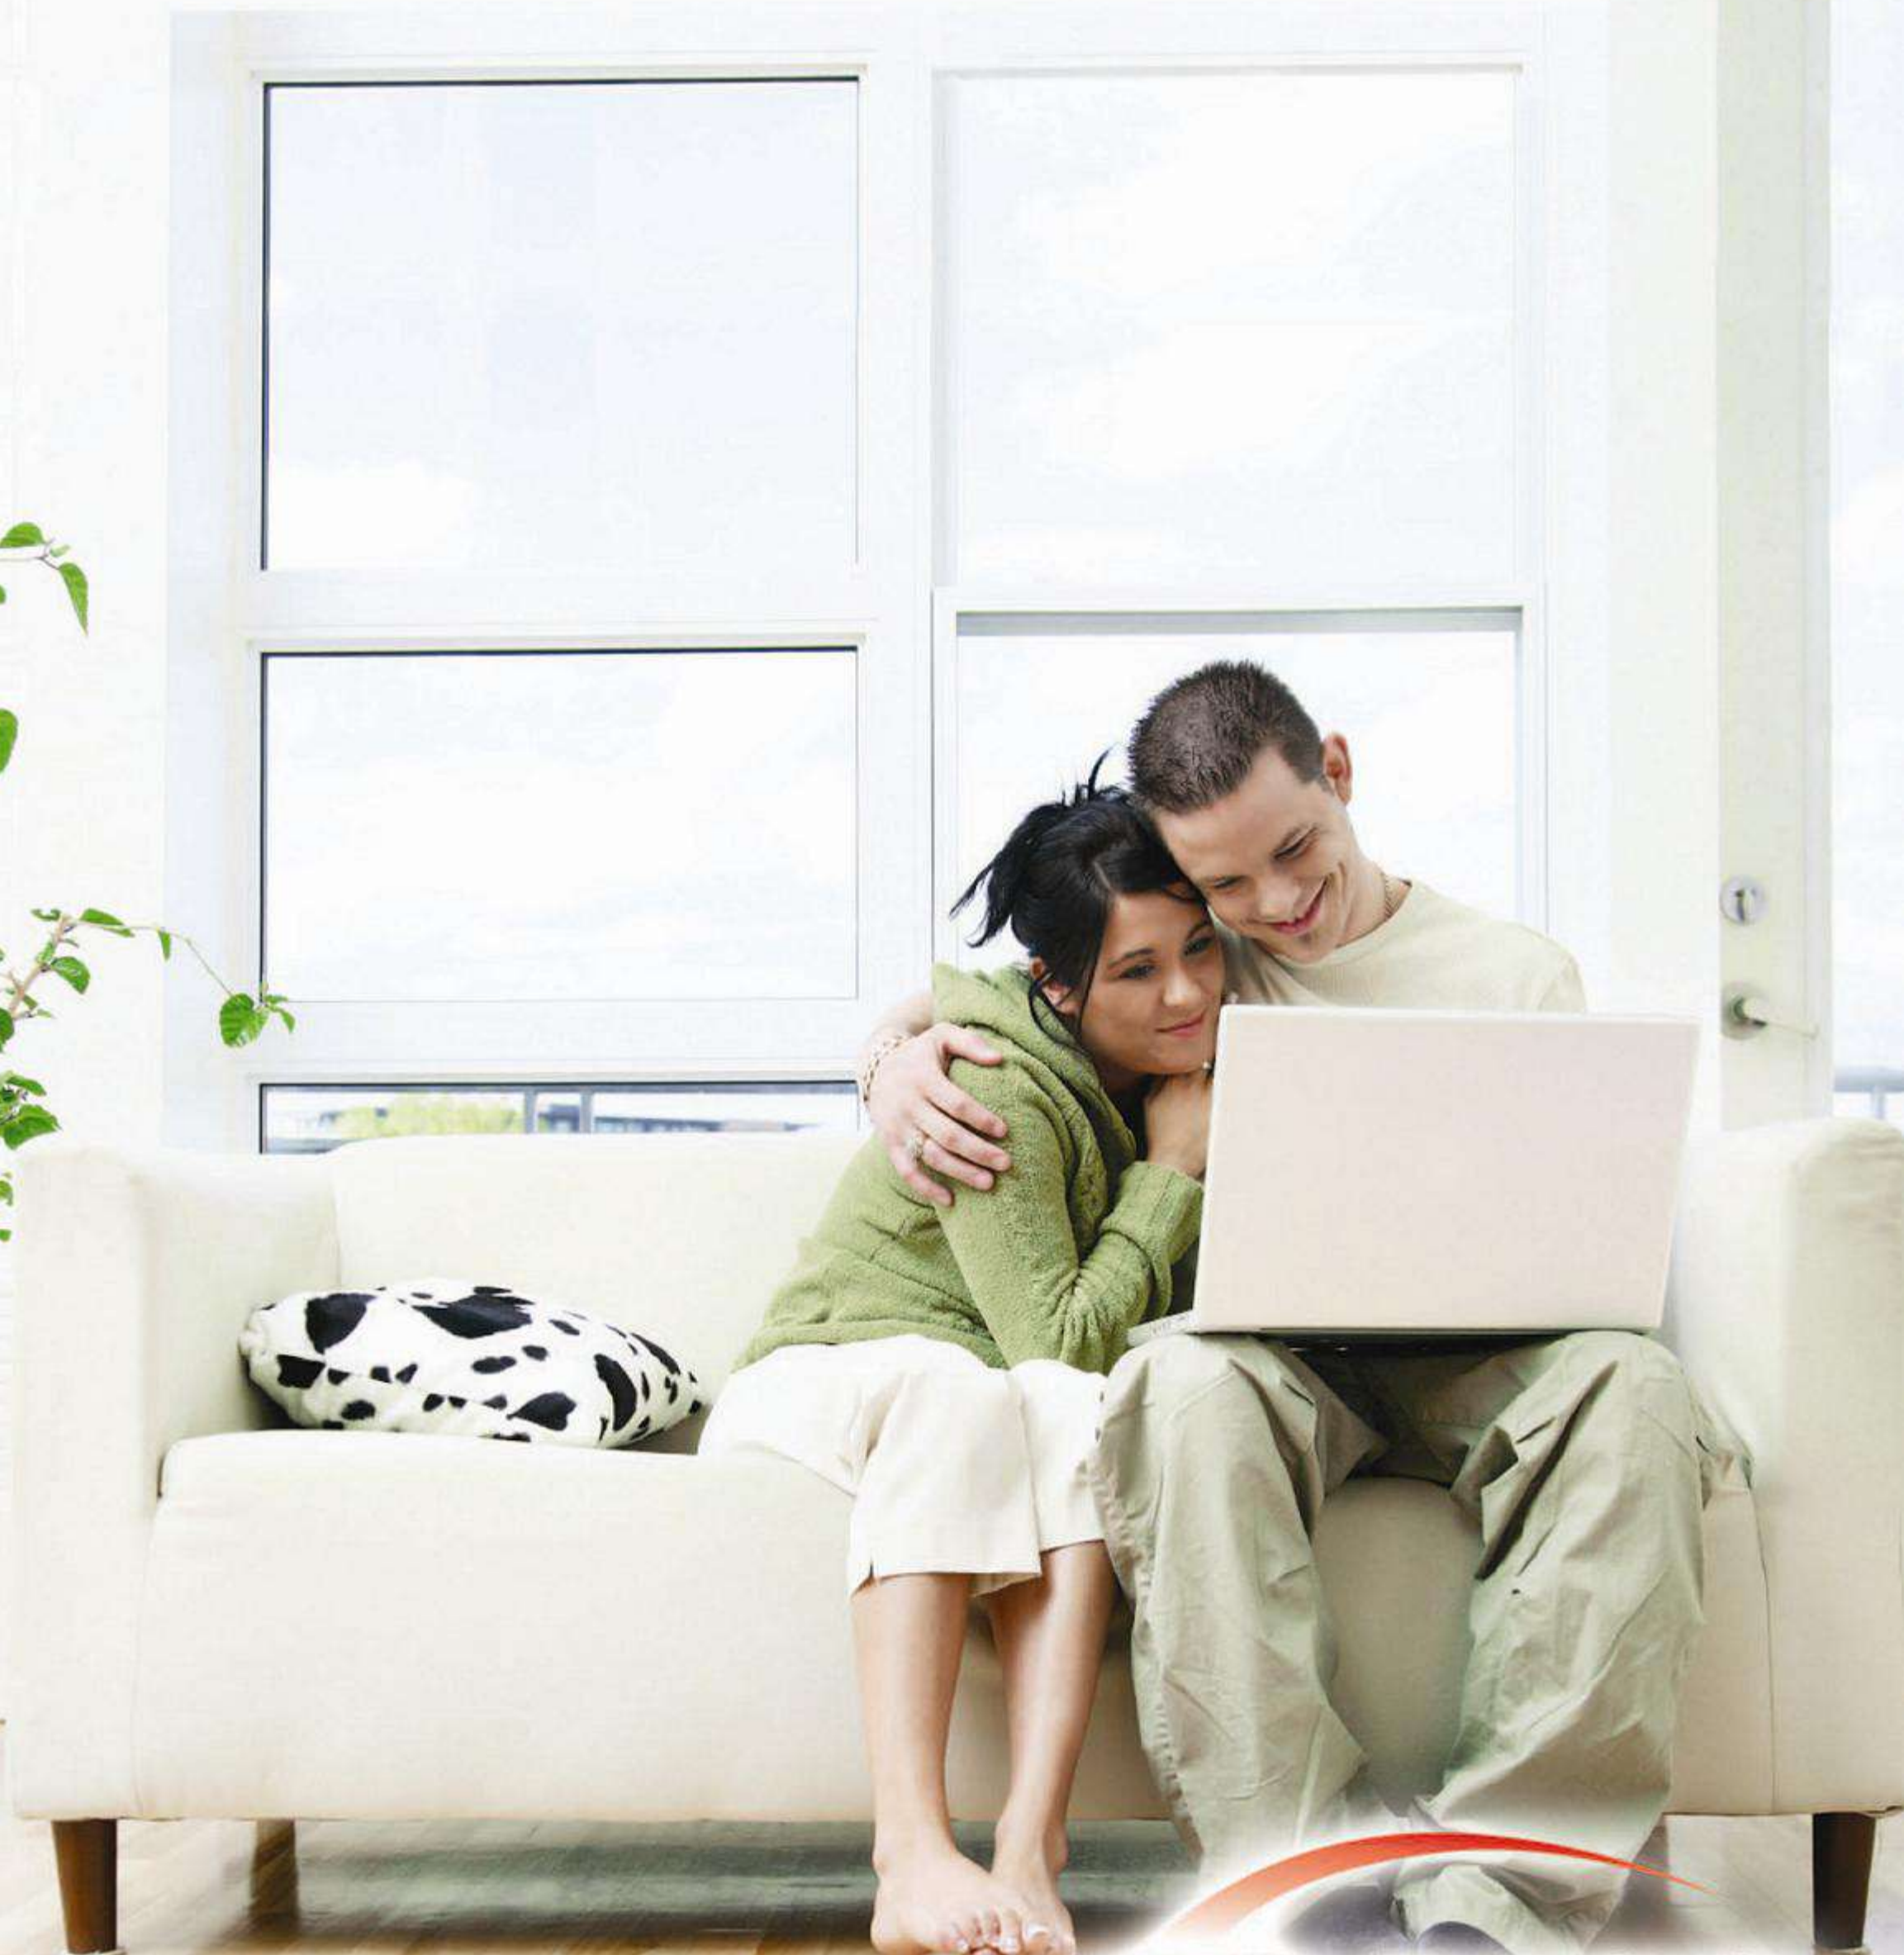


Innovation Beyond Comfort


Specifications




 **On/Off Power Button**
• Auto restart function


 **Fan Speed Adjustmet**
• 4 fan speed mode
[Auto, low, Medium, High]

 **Timer Setting**
• 24 hour ON/OFF timer setting

 **Operating Mode**
• 4 function mode
[Auto, cooling, Drying (dehumidification) and fan only]

 **Temperature/Time Adjustment Setting**
• Increase/decrease desired room temperature
• Increase/decrease desired (time/timer) adjustment

 **Clock Setting**
• 24 hours clock setting

 **Automatic Swing**
• Vertical auto up / down swing

 **LED Display**
• LED room temperature setting digital display

MODEL	INDOOR	TWM 10 KCW	TWM 13 KCW	TWM 16 KCW	TWM 18 KCW	TWM 24 KCW
NOMINAL CAPACITY	BTU/HR	9,500	12,500	16,000	18,000	22,500
	KW	2.78	3.66	4.69	5.28	6.59
TYPE		CHILLED WATER WALL MOUNTED				
POWER SUPPLY	V/PH/HZ	220 - 240 / 1 / 50				
Chilled water flow rate	usgpm	1.9	2.5	3.2	3.6	4.5
Chilled water pressure drop	ftwg	6.0	7.4	8.7	9.7	10.0
Chilled water piping connection	Chilled water in	inch	1/2"	1/2"	1/2"	5/8"
	Chilled water out	inch	1/2"	1/2"	1/2"	5/8"
FAN		CROSS FLOW FAN / DIRECT DRIVE				
TYPE		3 SPEED P.S.C				
MOTOR		3 SPEED P.S.C				
AIR FLOW	CFM	300	400	500	600	700
RATED POWER INPUT	WATT	40	44	50	60	69
RATED AMPERE	A	0.18	0.20	0.23	0.27	0.31
SOUND LEVEL	db(A)	36	38	39	41	48
EVAPORATOR COIL		SEAMLESS COPPER TUBE				
COIL	ROW / FPI	2/17	2/16	2/16	2/16	2/16
TUBE		ANTI CORROSION HYDROPHILIC ALUMINIUM SPLIT FIN				
FIN		ANTI CORROSION HYDROPHILIC ALUMINIUM SPLIT FIN				
CONTROL SYSTEM		WIRELESS REMOTE CONTROLLER				
OPERATING CONTROL		LED DISPLAY SCREEN				
CONTROL DISPLAY		WASHABLE ANTI FUNGUS SARAN NET FILTER				
AIR DISCHARGE		AUTO SWING LOUVER (UP/DOWN) & MANUAL (LEFT/RIGHT)				
TIMER		24 HOUR - ON/OFF TIMER				
AIR FILTER		WASHABLE ANTI FUNGUS SARAN NET FILTER				
UNIT DIMENSION						
WIDTH	MM	790	1,020	1,020	1,020	1,250
DEPTH	MM	193	215	215	215	257
HEIGHT	MM	270	320	320	320	325
NET WEIGHT	KG	9	13	14	14	17

All the specifications are subject to change by manufacturer without prior notice.

Note: The nominal cooling capacity is base on entering / leaving chilled water temp. 7 / 12 °C; indoor on coil temp. 27 / 19 °C (DB/WB).



TOPAIRE Sales & Services Sdn Bhd (274725-W)

No. A7-2-2, Block A, Megan Salak Park, Jalan 2/125 E,

Taman Desa Petaling, 57100 Kuala Lumpur, Malaysia.

T: 03-90563228 | F: 03-90562800 | E: sales@topaire.com.my

W: www.topaire.com.my

