


**TOPAIRE**

AIR CONDITIONER

Eco-friendly  
R410A

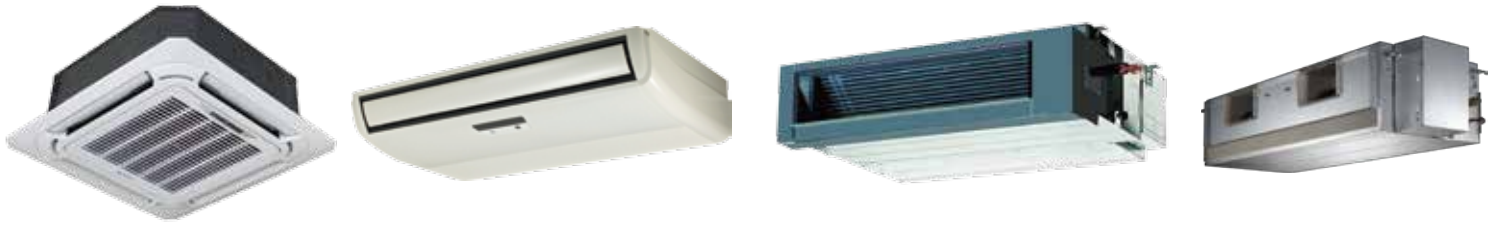

## Air Cooled Split

- CEILING CASSETTE
- CEILING / FLOOR
- DUCTED LOW STATIC
- DUCTED MEDIUM STATIC

 Innovation Beyond Comfort





# R410A - Eco-Friendly & Zero Ozone Depletion Potential Refrigerant



## DUCTED LOW/MEDIUM STATIC Series



**Model: TCR 13 G4 / TCR 20 G4 / TCR 25 G4 / TCR 30 G4**



**Model: TEB 40 G4 / TEB 50 G4 / TEB 60 G4**

### Features

- Durable electro-galvanized steel casing.
- External static pressure operating range 0.2 - 0.5 inwg.
- LED light indicator display panel & auto restart function.
- Evaporator & condenser coil with durable gold coating aluminium slit fin.
- Washable saran net air filter.

(Optional)



- Built in High Head lift Up 250 mm Water Drain Pump.
- To Improve Drain Water Flow & Prevent Drain Pipe Clogging.



Standard Wired Remote Controller for TCR & TEB model

### Specification

MODEL	INDOOR	TCR 13 G4	TCR 20 G4	TCR 25 G4	TCR 30 G4	
	OUTDOOR	TAS 13 AF4	TAS 20 B4	TAS 25 B4	TAS 30 B4	
COOLING CAPACITY	BTU/HR	12,500	19,000	24,000	30,000	
	KW	3.66	5.57	7.03	8.79	
POWER SUPPLY	V / Ph / Hz	220 - 240 / 1 / 50				
POWER INPUT	W	1,229	2,035	2,937	3,336	
NOMINAL OPERATING CURRENT	A	5.2	8.7	13.7	15.8	
INDOOR UNIT	AIR FLOW	CFM	480	580	800	1060
	ESP	INWG	0.2	0.2	0.2	0.3
	SOUND PRESSURE	dB(A)-H/M/L	44 / 42 / 40	44 / 42 / 40	43 / 40 / 37	47 / 40 / 38
	UNIT DIMENSION	WxDxH (MM)	880 x 674 x 210	880 x 674 x 210	1,100 x 774 x 249	1,100 x 774 x 249
	WEIGHT	KG	24	24	32	32
CONTROLLER	TYPE	WIRED REMOTE				
OUTDOOR UNIT	UNIT DIMENSION	WxDxH (MM)	770 x 300 x 555	770 x 300 x 555	845 x 363 x 702	946 x 410 x 810
	WEIGHT	KG	30	34	48	65
	REFRIGERANT	TYPE	R 410 A			
	CAPACITY CONTROL	TYPE	CAPILLARY TUBE OR THROTTLE VALVE AT OUTDOOR UNIT			
REFRIGERANT PIPE	LIQUID	MM(IN)	6.35 (1/4)	6.35 (1/4)	9.52 (3/8)	9.52 (3/8)
	SUCTION	MM(IN)	12.70 (1/2)	12.70 (1/2)	15.88 (5/8)	19.00 (3/4)

MODEL	INDOOR	TEB 40 G4	TEB 50 G4	TEB 60 G4		
	OUTDOOR	TAS 36 AX4	TAS 40 B4	TAS 50 B4	TAS 60 B4	
COOLING CAPACITY	BTU/HR	36,000	40,000	48,000	60,000	
	KW	10.55	11.72	14.07	17.58	
POWER SUPPLY	V / Ph / Hz	220 - 240 / 1 / 50	380 - 415 / 3 / 50			
POWER INPUT	W	3,975	4,073	5,392	6,500	
NOMINAL OPERATING CURRENT	A	19.7	9.4	11.1	13.1	
INDOOR UNIT	AIR FLOW	CFM	1,500	1,500	1,650	1,850
	ESP	INWG	0.5	0.5	0.5	0.5
	SOUND PRESSURE	dB(A)-H/M/L	51 / 49 / 46	51 / 49 / 46	51 / 49 / 46	52 / 50 / 48
	UNIT DIMENSION	WxDxH (MM)	1,200 x 625 x 380	1,200 x 625 x 380	1,200 x 625 x 380	1,200 x 625 x 380
	WEIGHT	KG	46	46	46	46
CONTROLLER	TYPE	WIRED REMOTE				
OUTDOOR UNIT	UNIT DIMENSION	WxDxH (MM)	976 x 395 x 805	946 x 410 x 810	900 x 350 x 1,170	900 x 350 x 1,170
	WEIGHT	KG	65	72	92	92
	REFRIGERANT	TYPE	R 410 A			
	CAPACITY CONTROL	TYPE	CAPILLARY TUBE OR THROTTLE VALVE AT OUTDOOR UNIT			
REFRIGERANT PIPE	LIQUID	MM(IN)	9.52 (3/8)	9.52 (3/8)	9.52 (3/8)	9.52 (3/8)
	SUCTION	MM(IN)	15.88 (5/8)	19.00 (3/4)	19.00 (3/4)	19.00 (3/4)

All specifications are subject to change by manufacturer without prior notice.

Note: The nominal cooling capacity is based on condenser outdoor air entering temp. 35°C (DB); indoor on coil temp. 27/19°C (DB/WB)



**TOPAIRE Sales & Services Sdn Bhd** (274725-W)

No. A7-2-2, Block A, Megan Salak Park, Jalan 2/125 E,  
Taman Desa Petaling, 57100 Kuala Lumpur, Malaysia.

T: 03-90563228 | F: 03-90562800 | E: sales@topaire.com.my |  
W: www.topaire.com.my



R410A Fxd.Spd B4-AX4/20

This catalogue Printed with vegetable-based Ink

