




Wall Mounted G3 Series
High Performance And
Powerful Airflow

**HIGHLY
DURABLE
GOLD FIN**

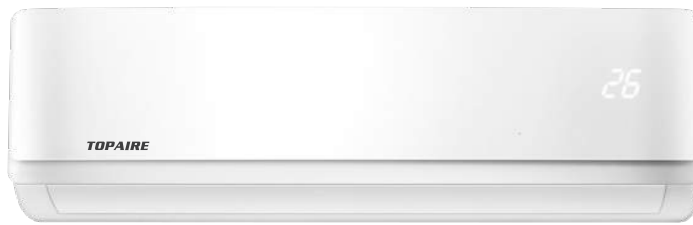

TWMV 30G3

Features

- LED light temperature display panel
- Auto restart
- 4 way air distribution with auto swing (Up & Down), manual (left & right)
- Washable saran net air filter

Remote Control

On/Off Power Button

Temperature Adjustment
• Increase/decrease room temperature.

Fan Adjustment
• 4 fan speed mode [Auto, low, Medium, High]

Smart
• To realize intelligentized operation [Auto mode]

Air Refresh
• This function not available.

Turbo Jet Cooling
• Fast cooling and powerful air flow to rapidly reach your desired room temperature.



Fan Sweep
• For vertical up/down swing.

Sleep Mode
• Energy-Saving ECO-logic mode to maintain most comfortable temperature for you
• Applicable for cooling and dry mode only

Mode Selection
• 4 function mode [Auto, Cool, Dry, fan only]

Timer Setting
• 24 hour ON/OFF timer setting.

Reset Mode
• Reset to factory setting

Condensing Unit



TASV 30G3

Specification

TYPE		INVERTER
MODEL	(OUTDOOR)	TASV 30G3
	(INDOOR)	TWMV 30 G3
NOMINAL CAPACITY	(BTU/HR)	30,000 (10,920 - 30,700)
	(KW)	8.79 (3.20 - 9.00)
POWER INPUT	KW	2,330
OPERATING CURRENT	A	10.70
POWER SUPPLY	(V/PH/HZ)	220 - 240 / 1 / 50
INDOOR		FEATURES
FAN		
SOUND LEVEL	(dBA)	53/45/40
AIR FLOW	(CFM)	850
RATED POWER INPUT	(WATT)	58
RATED AMPERE	(A)	0.3
TYPE		CROSS FLOW FAN / DIRECT DRIVE
EVAPORATOR COIL		
TUBE		SEAMLESS INNER GROOVE COPPER TUBE
FIN		HYDROPHILIC ALUMINIUM SLIT FIN
DIMENSION		
WIDTH	(MM)	1,259
DEPTH	(MM)	282
HEIGHT	(MM)	362
NET WEIGHT	(KG)	18
OUTDOOR		FEATURES
COMPRESSOR		
POWER SUPPLY	(V/PH/HZ)	220 - 240 / 1 / 50
NOMINAL POWER INPUT	(WATT)	2,200
NOMINAL OPER. CURRENT	(A)	10
TYPE		DC INVERTER ROTARY
PROTECTION DEVICE		INTERNAL THERMAL OVERLOAD
FAN		
TYPE		PROPELLER FAN DIRECT DRIVE
RATED POWER INPUT	(WATT)	150
RATED AMPERE	(A)	1.21
CONDENSOR COIL		
TUBE		SEAMLESS INNER GROOVE COPPER TUBE
FIN		HYDROPHILIC ALUMINIUM GOLD FIN
REFRIGERANT		R32
CAPACITY CONTROL		ORIFICE / CAP. TUBE AT OUTDOOR
CASING		
MATERIAL		ELECTRO-GALVANIZED MILD STEEL
FINISH		EPOXY POWDER COATING
PIPE		
DISCHARGE	(MM / IN)	9.52 (3/8)
SUCTION	(MM / IN)	15.88 (5/8)
DIMENSION		
WIDTH	(MM)	946
DEPTH	(MM)	410
HEIGHT	(MM)	810
NET WEIGHT	(KG)	63

All the specifications are subject to change by the manufacturer without prior notice.

Note : The nominal cooling capacity is based on condenser outdoor air entering temp. 35°C (DB); indoor on coil temp. 27/19°C (DB/WB)

TOPAIRE

AIR CONDITIONER

TOPAIRE Sales & Services Sdn Bhd (274725-W)

No. A7-2-2, Block A, Megan Salak Park, Jalan 2/125 E,
Taman Desa Petaling, 57100 Kuala Lumpur, Malaysia.

T: 03-90563228 | F: 03-90562800 | E: sales@topaire.com.my

W: www.topaire.com.my



TSS/WM3HP/G3/0921