




Wall Mounted AG3/G3 Series  
High Performance And  
Powerful Airflow

**HIGHLY  
DURABLE  
GOLD FIN**



**TWM 30AG3**

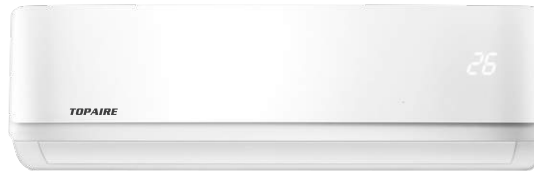

**TWMV 30G3**

## Features

- LED light temperature display panel
- Auto restart
- 4 way air distribution with auto swing (Up & Down), manual (left & right)
- Washable saran net air filter

## Remote Control

On/Off Power Button

Temperature Adjustment  
• Increase/decrease room temperature.

Fan Adjustment  
• 4 fan speed mode [Auto, low, Medium, High]

Smart  
• To realize intelligentized operation [Auto mode]

Air Refresh  
• This function not available.

Turbo Jet Cooling  
• Fast cooling and powerful air flow to rapidly reach your desired room temperature.



Fan Sweep  
• For vertical up/down swing.

Sleep Mode  
• Energy-Saving ECO-logic mode to maintain most comfortable temperature for you  
• Applicable for cooling and dry mode only

Mode Selection  
• 4 function mode [ Auto, Cool, Dry, fan only ]

Timer Setting  
• 24 hour ON/OFF timer setting.

Reset Mode  
• Reset to factory setting

## Condensing Unit



**TAS 30AG3  
TASV 30G3**

## Specification

TYPE		NON INVERTER	INVERTER
MODEL	OUTDOOR	TAS 30AG3	TASV 30G3
	INDOOR	TWM 30AG3	TWMV 30G3
NOMINAL CAPACITY	Btu/Hr	30,000	30,000 (10,920 - 30,700)
	kW	8.79	8.79 (3.20 - 9.00)
POWER INPUT	W	2586	2,330
RATED CURRENT	A	11.8	10.70
POWER SUPPLY	V/Ph/Hz	220 - 240 / 1 / 50	
INDOOR		FEATURES	
FAN			
SOUND LEVEL	dBa	51 / 48 / 42	53 / 45 / 40
AIR FLOW	CFM	880	850
TYPE	CROSS FLOW FAN / DIRECT DRIVE		
EVAPORATOR COIL			
TUBE	SEAMLESS INNER GROOVE COPPER TUBE		
FIN	HYDROPHILIC ALUMINIUM SLIT FIN		
DIMENSION			
W x D x H	mm	1259 x 283 x 362	1259 x 282 x 362
NET WEIGHT	kg	18	18
OUTDOOR		FEATURES	
COMPRESSOR			
POWER SUPPLY	V/Ph/Hz	220 - 240 / 1 / 50	220 - 240 / 1 / 50
TYPE	ROTARY		DC INVERTER ROTARY
PROTECTION DEVICE	INTERNAL THERMAL OVERLOAD		
FAN			
TYPE	PROPELLER FAN DIRECT DRIVE		
CONDENSOR COIL			
TUBE	SEAMLESS INNER GROOVE COPPER TUBE		
FIN	HYDROPHILIC ALUMINIUM GOLD FIN		
REFRIGERANT	R32		
CAPACITY CONTROL	ORIFICE / CAP. TUBE AT OUTDOOR		
CASING			
MATERIAL	ELECTRO-GALVANIZED MILD STEEL		
FINISH	EPOXY POWDER COATING		
PIPE			
DISCHARGE	mm / in	9.52 (3/8)	9.52 (3/8)
SUCTION	mm / in	15.88 (5/8)	15.88 (5/8)
DIMENSION			
W x D x H	mm	946 x 410 x 810	946 x 410 x 810
NET WEIGHT	kg	61	63

All the specifications are subject to change by the manufacturer without prior notice.

Note : The nominal cooling capacity is based on condenser outdoor air entering temp. 35°C (DB); indoor on coil temp. 27/19°C (DB/WB)



**TOPAIRE Sales & Services Sdn Bhd** (274725-W)  
No. A7-2-2, Block A, Megan Salak Park, Jalan 2/125 E,  
Taman Desa Petaling, 57100 Kuala Lumpur, Malaysia.  
T: 03-90563228 | F: 03-90562800 | E: sales@topaire.com.my  
W: www.topaire.com.my



TSS/WM3HP/AG3/G3/1024